

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US2005/043676

International filing date: 02 December 2005 (02.12.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/632,665  
Filing date: 03 December 2004 (03.12.2004)

Date of receipt at the International Bureau: 20 February 2006 (20.02.2006)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1427077

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*February 10, 2006*

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.**

**APPLICATION NUMBER: 60/632,665**

**FILING DATE: *December 03, 2004***

**RELATED PCT APPLICATION NUMBER: *PCT/US05/43676***

**THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US60/632,665***



Certified by

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. \_\_\_\_\_

**INVENTOR(S)**

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
Yaser S.	Abdelsamed	Granville, Ohio

Additional inventors are being named on the \_\_\_\_\_ separately numbered sheets attached hereto

**TITLE OF THE INVENTION (500 characters max)**

**PRISMATIC LUMINAIRE WITH LIGHT-MODIFYING FLANGE**

Direct all correspondence to: **CORRESPONDENCE ADDRESS**

☒ Customer Number:

22902

OR

☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

**ENCLOSED APPLICATION PARTS (check all that apply)**

☒ Specification Number of Pages 6

☐ CD(s), Number \_\_\_\_\_

☒ Drawing(s) Number of Sheets 2

☐ Other (specify) \_\_\_\_\_

☐ Application Data Sheet. See 37 CFR 1.76

**METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT**

☐ Applicant claims small entity status. See 37 CFR 1.27.

☒ A check or money order is enclosed to cover the filing fees.

☒ The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 50-1088

☐ Payment by credit card. Form PTO-2038 is attached.

FILING FEE  
Amount (\$)

160.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: \_\_\_\_\_

Respectfully submitted

[Page 1 of 2]

Date 12/3/2004

SIGNATURE

REGISTRATION NO. 30,340

TYPED or PRINTED NAME Conrad J. Clark

(if appropriate)

Docket Number: 11059-0008

TELEPHONE 202-835-1111

**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

## **PRISMATIC LUMINAIRE WITH LIGHT-MODIFYING FLANGE**

### **TECHNICAL FIELD**

[01] This invention relates to the art of luminaires. In particular, the invention relates to a luminaire having a plurality of prismatic reflectors that reflect incident light from a source onto an area to be illuminated.

### **BACKGROUND ART**

[02] Luminaires of the type having a prescribed overall dome-like structure with a series of circumferentially spaced prismatic reflectors on the exterior surface are known. The prismatic reflectors are formed of two, preferably perpendicular, faces with the intersections of the faces aligned in generally longitudinal directions with respect to the longitudinal axis of the luminaire. The prismatic reflectors are arranged such that the light passing through the interior surface of the luminaire strikes the outer surface at near the critical angle whereby the light is reflected toward the interior of the luminaire at an angle that results in its exiting the luminaire.

[03] Such luminaires are typically configured such that the light source is supported near an upper end and the luminaire is open at the lower end opposite the light source. The luminaire wall generally terminates at the open end in a flange having a width slightly greater than the thickness of the wall of the luminaire. This flange is typically formed by a planar bottom surface oriented perpendicular to the longitudinal axis of the luminaire, which renders it horizontal when the luminaire is in use. An example of such a prior art luminaire is that shown in United States Patent 5,036,445 (Osteen).

[04] A problem with the prior luminaires of this type is that some of the light entering the luminaire wall through the inner surface becomes trapped between the inner and outer walls. That is, some of the light that passes through the inner face of the luminaire is reflected by the outer prism faces but is not then transmitted back through the inner surface because it is reflected from the inner surface. This light reflected at the luminaire-air interface becomes trapped by repeated reflection between the outer prism faces and the inner surface, much as light is trapped in a waveguide. When this

phenomenon is combined with the dome-shape of a typical luminaire the result is that the trapped light eventually travels down the sides of the luminaire at small angles with respect to the vertical (nadir). The trapped light is ultimately incident on the bottom flange of the luminaire at a high angle of incidence and often passes directly through the flange with little change in direction, creating a bright annulus of light at angles near nadir.

[05] In the general case, this annulus of light passing through the flange is unwanted. One reason the annulus is undesired is that it is very bright and thus contrasts with the remainder of the light distribution. The annulus is bright because the direction of the light is near nadir and does not distribute the light into the luminaire's light pattern. Instead, the light is concentrated into a small solid angle.

### **SUMMARY OF THE INVENTION**

[06] In accordance with the invention, the flange is configured to direct trapped light incident on a flange into desired directions or patterns. In one embodiment, the bottom face of the flange is beveled whereby the beveled part refracts the incident trapped light over a range of angles that moves it away from the nadir (i.e., raises it) and also spreads it out. This reduces the brightness of the light passing through the flange and makes it less noticeable. The bevel face may be planar or curved (e.g., and arc, ellipse, parabola) or formed by a plurality of smaller line segments or by lenticular elements. As well, the flange may be provided with multiple prisms.

[07] In accordance with a second embodiment of the invention, the light from the flange is modified in other ways to render it less objectionable or even decorative. For example, a color filter may be applied to the bottom of the flange to create a colored pattern of desired shape and brightness. And such a filter may be combined with the beveled or angled flange to provide the desired pattern. As well, the flange may be colored in other ways, such as by painting the flange or by coloring the flange material itself. Other optical features may also be added to provide a desired light pattern from the flange light.

[08] It is an object of this invention to provide structure that modifies light trapped in a luminaire wall and incident on a flange of the luminaire by changing its color, intensity, or direction to result in a desired light pattern.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

[09] Figure 1 is a partial vertical cross section of a luminaire having a flange according to a first embodiment of the invention.

[10] Figure 2 is a partial vertical cross section of the flange of the luminaire shown in figure 1.

[11] Figure 3 is a vertical cross section showing a second embodiment of a luminaire in accordance with the invention.

## **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

[12] With reference to the drawing figures, figure 1 is a partial vertical cross section of a luminaire 2 formed by a wall 4 of generally transparent material, such as glass or acrylic plastic. The luminaire is configured to reflect light originating from a source (not shown) that is centrally located in the luminaire as is known in the art. The inner surface 6 of the wall 4 is generally smoothly curved but may be provided with a more complex shape as is known in the art.

[13] The luminaire wall 4 is made reflective by providing a series of prisms on the outer surface of the wall 4. The prisms are formed by faces 10 that extend longitudinally along the wall in a prescribed curve to form the outer surface of the wall. Adjacent pairs of faces 10 form a dihedral angle of 90° and intersect at peaks 12. By this arrangement, light rays from the light source entering the wall from the central portion of the luminaire are generally reflected by the prism faces 10 by total internal reflection, as is known in the art.

[14] The bottom edge of the luminaire is formed by a flange 14 which will be described in detail below.

[15] An illustrative light ray incident on the inner surface 6 of the wall 4 is shown at 16. Light ray 16 originates in a lamp (not shown), impinges on the wall 4 and is reflected by the faces 10 to form reflected ray 18, which exits the luminaire through the opening formed by the flange 14. However, when the reflected ray impinges on the surface 6, some of the light is reflected at the surface back toward the outer surface of the luminaire. Such a ray is illustrated at 20.

[16] The ray 20 is in turn reflected again by prism faces 10, which is illustrated by ray 22. It will be appreciated that in this manner light is trapped inside the wall 4 of

the luminaire and is reflected repeatedly at the inner surface 6 and the prism faces 10. It will further be appreciated that because of the overall shape of the luminaire, the trapped light such as that illustrated by ray 22 will be incident on the flange 14 at a relatively small angle of incidence.

[17] Prior art flanges, such as that shown in USP 5,036,445, are generally planar, which allows the trapped light to pass directly through the flange in a direction close to vertical (nadir). The trapped light passing through the flange in this manner forms a relatively bright annulus of light directed downward, which is undesirable because it contrasts with the light pattern created by the remainder of the luminaire.

[18] In accordance with the invention, the flange is provided with optical means that ameliorates the adverse effects of trapped light incident on the flange. In the embodiment shown in figures 1 and 2, the flange is provided with an angled face 24 positioned to receive the incident trapped light rays 22. Of course, ray 22 is only illustrative, and other trapped rays will be incident on the face 24 at other locations on the face and at other angles of incidence.

[19] Face 24 is preferably oriented such that the incident ray 22 is refracted to form ray 26. This refraction accomplishes two objectives. First, the refraction “lifts” the light passing through the flange by increasing its angular relationship with respect to nadir. Thus, refraction of the trapped rays by face 24 redirects that light to higher angles, which reduces objectionable effects of light at nadir. Second, by increasing the angle of the light, the light is spread out over a larger area, thus reducing its brightness and allowing it to merge with the other light from the luminaire.

[20] With reference to figure 2, face 24 is shown oriented at an angle  $\epsilon$ , which is illustrated to be  $25^\circ$  with respect to the horizontal. It will be appreciated that ray 22 forms an angle  $\alpha$  with respect to the vertical and is incident on the face 24 at an angle of incidence  $\theta_a$ . The angle of incidence geometrically equals  $\alpha + \epsilon$ . Ray 22 will be refracted at face 24 as is known in the art to form refracted ray 26. Ray 26 will exit face 24 at angle of refraction  $\theta_A$ , and form an angle  $\beta$  with respect to the vertical. If one considers the situation wherein the rays 22 are incident over a range of angles  $0^\circ < \alpha < 15^\circ$ , the angles  $\beta$  are:

$\alpha$	$\beta$
0°	13.6°
5°	22.5°
10°	32.8°
15°	46.5°

It is apparent from the above table that for a face angled at 25° to the horizontal a fifteen-degree range of angles of incidence in the trapped rays results in a thirty-three degree spread in the angles of the refracted rays. This indicates that the trapped light incident on the improved flange is both raised and spread.

[21] Figure 3 illustrates another embodiment of the invention. According to the embodiment of figure 3, rays are intentionally introduced into the wall and trapped to provide increased light level to the flange. For example, the inner surface 6 of the wall 4 can be provided with a section 28 that forms an aperture that passes rays 30 into the wall in a desired direction and intensity. These rays are trapped in the wall as shown at 32 and are eventually incident on the flange 34. Flange 34 may be planar as illustrated but may also have an angled face as shown in the embodiment of figures 1 and 2. As well, flange 34 may have one or more faces configured to provide any desired optical effect; for example, flange 34 may have a curved face, a stepped face, or a prismatic face.



[22] In accordance with the embodiment of figure 3, flange 34 is provided with a colored filter 36 whereby light passing the flange is colored to provide a desired effect. This filter may take any of several forms, including a colored film attached to the flange, a film integral with the flange, a layer of paint, etc.

[23] It will be appreciated that in accordance with the invention, a luminaire is provided with means to control light trapped in the wall of the luminaire and incident on a flange. Modifications within the scope of the appended claims will be apparent to those of skill in the art.



I claim:

1. In a luminaire of the type formed by a transparent wall with a reflecting outer surface and a bottom flange, the improvement comprising means on said flange for modifying the light trapped in said wall.
2. A luminaire according to claim 1 wherein said means comprises a refracting face on said flange configured to receive said trapped light and redirecting it away from nadir.
3. A luminaire according to claim 1 wherein said means comprises a colored filter.
4. A luminaire according to claim 3 wherein said transparent wall includes an aperture for admitting increased amounts of trapped light to said wall.

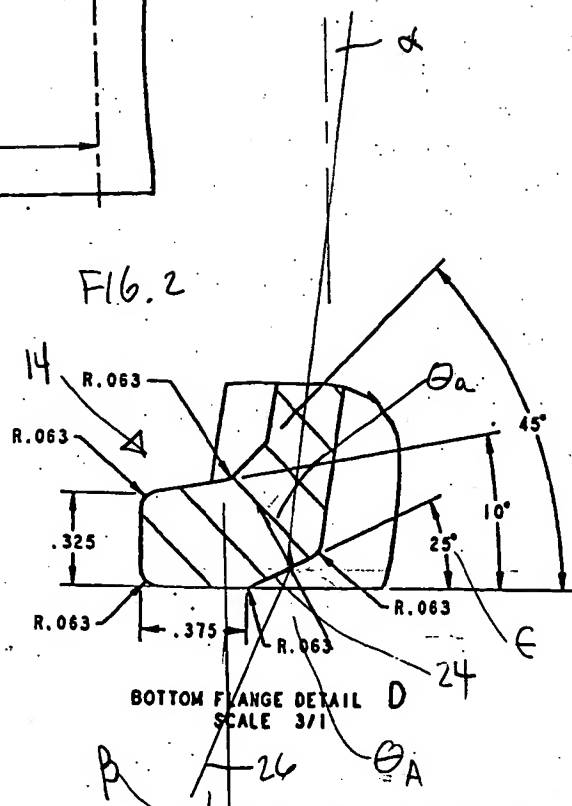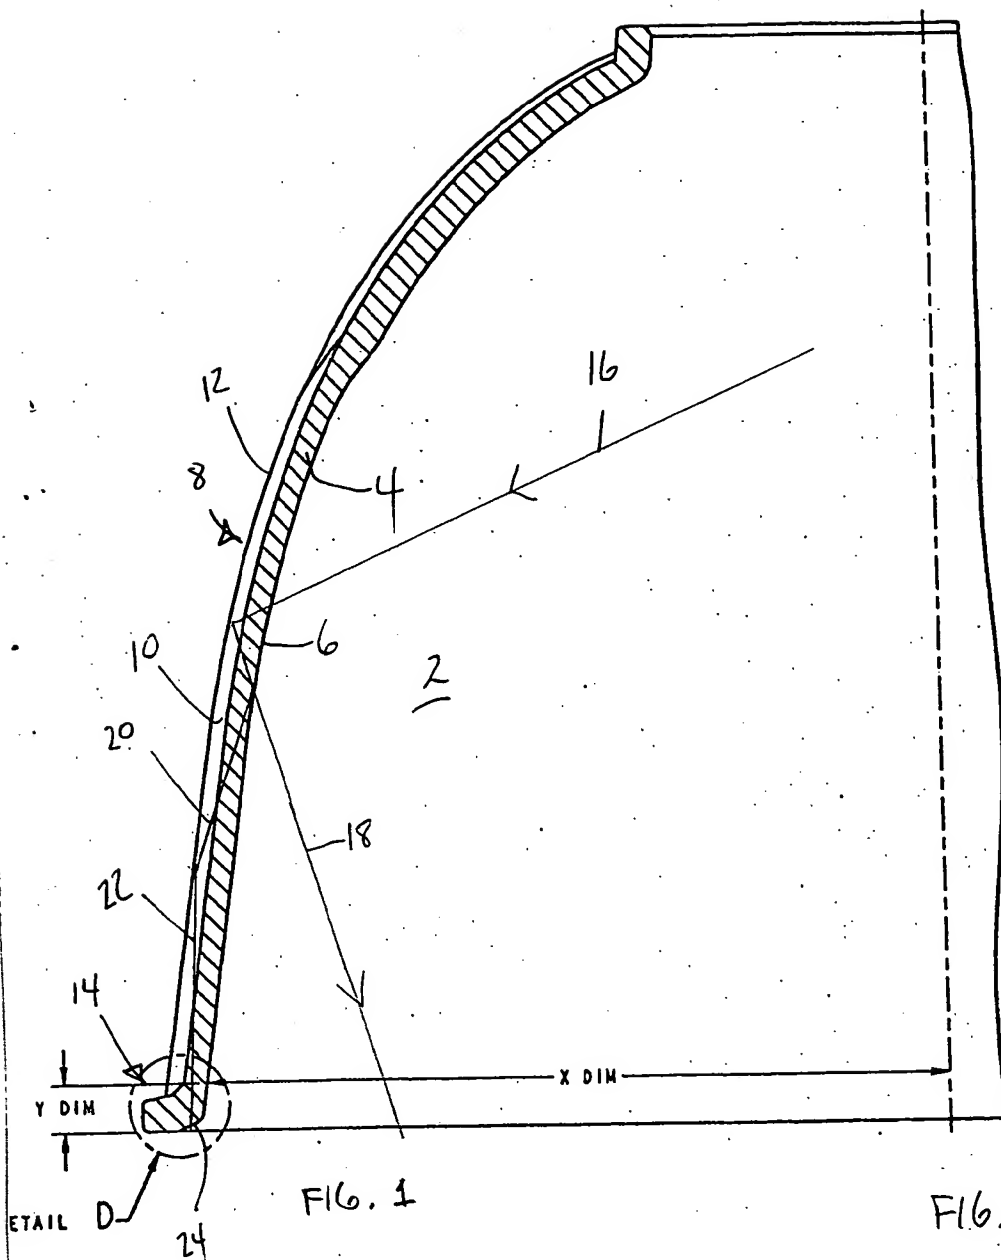

BEST AVAILABLE COPY

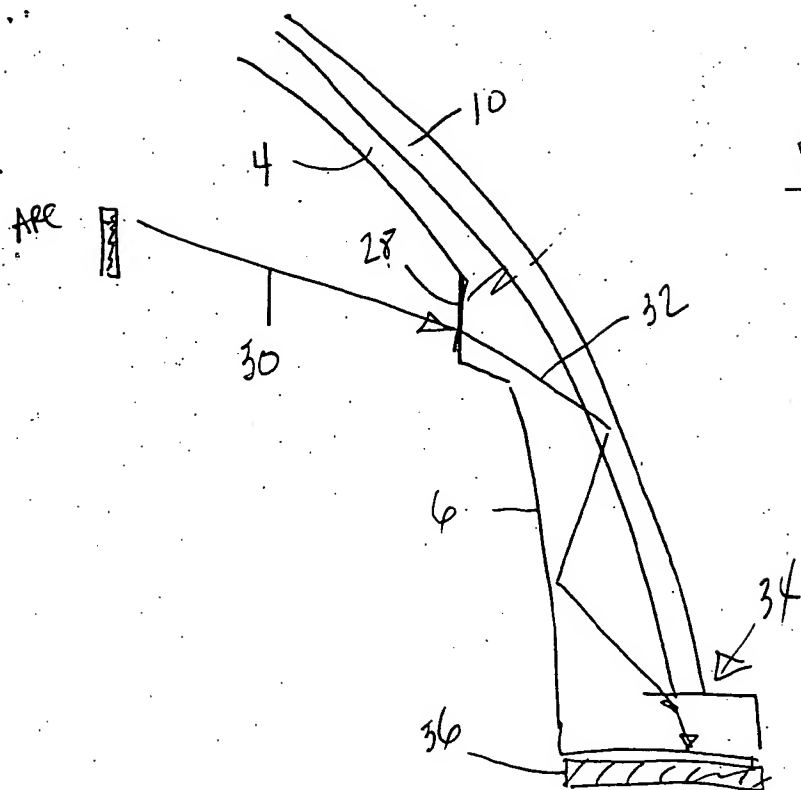


FIG. 3